



D.FAB 3D α.1.00

Plasticiser/Superplasticiser


CHARACTERISTICS

D.FAB IIID α.1.00 is a concrete plasticiser and a superplasticiser with very good plasticising and homogenising as well as low cement dependent retarding effect.

TECHNICAL DATA

Density (20 °C):	1,20 ± 0,03 g/cm ³
Cl-Content:	≤ 0,10 M.-%
Na ₂ O-equivalent:	≤ 8,50 M.-%
Color and form:	brown liquid
Recommended range of dosage:	0,2 – 2,0 M.-% by weight of cement

EFFECTS

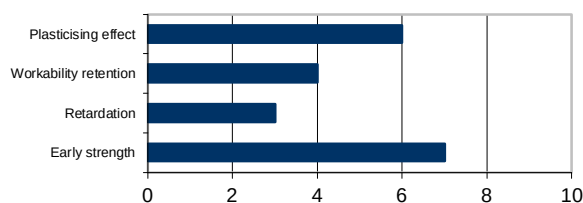

The information in this table refers to the active substance type without consideration of the active ingredient content.

APPLICATION

- **D.FAB 3D α.1.00** is a plasticiser to be used in combination D.FAB 3D β.1.00 for 3D printing applications.

ADMISSION

- **D.FAB IIID α.1.00** is permanently subject to internal factory production controls
- **D.FAB IIID α.1.00** corresponds to the regulations of **EN 934-1** and **EN 934-2, Tab. 2, 3.1 + 3.2**

STORAGE

Storage life is 12 months from date of manufacture if stored correctly (tightly closed at > +5 °C):

- Keep storage containers and tanks **tightly closed**
- Protect product from **frost, heat** and **direct sunlight**

CONTACT

CEMEX Admixtures GmbH

Geseker Straße 31–33

33154 Salzkotten

Germany

Tel. +49 5258 9858-0

admixtures.de@cemex.com

www.admixtures.de

www.admixtures.de



Copyright © 2020 CEMEX Trademarks Holding Ltd. All rights reserved.

Note: The raw materials used and the products manufactured by us are submitted to precise plant control. The content of our technical leaflet is based on three decades of experience, research and technical back up. Due to continuous development and varying applications we reserve the right to revise and improve our product. Our technical department and experts are available to give assistance on request. An advantage you should make use of!